


xxx IF IN DOUBT ASK xxx

JOB No.

ONLY.

ISSUED TO PRODUCTION

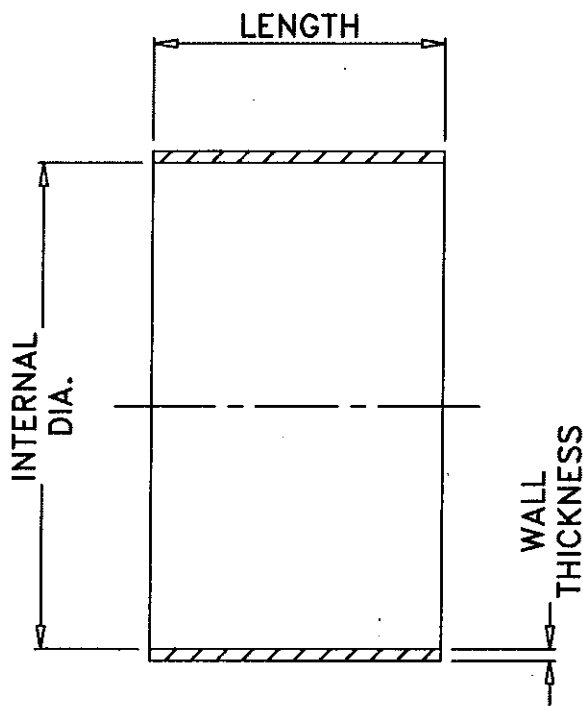

NOMINAL BORE	DN	INTERNAL DIA.	WALL THICKNESS		LENGTH	PART NUMBER
			(mm)	(SWG)		
1/8"	3	8.20	0.91	20	13	FC003**1B
1/4"	6	14.58	1.22	18	10	FC006**1B
3/8"	10	19.58			15	FC010**1B
1/2"	12	23.59				FC012**1B
5/8"	15	28.50			20	FC015**1B
3/4"	20	29.79				FC020**1B
1"	25	37.27			25	FC025**1B
1 1/4"	32	48.78	1.63	16	40	FC032**1B
1 1/2"	40	56.91				FC040**1B
2"	50	67.98				FC050**1B
2 1/2"	65	87.79				FC065**1B
3"	80	99.99				FC080**1B
3 1/2"	90	117.50				FC090**1B
4"	100	129.50			72	FC100**1B
5"	125	153.70				FC125**1B
6"	150	181.10				FC150**1B
8"	200	235.60				100
10"	250	292.00	FC250**1B			

PART NUMBER COMMON MATERIAL CODES (**) (OTHER CODES MAY BE USED) (REFER TO PCM104)	
MATERIAL	CODE
ST.STL. 316 S11	AB
ST.STL. 304 S31	AT
BRASS	HB



© 2006

ISSUE 1
26 October 2006
ISSUE 2
AN 10460
14 May 2008

Tolerances :-
0. +/- 0.50 mm
0.0 +/- 0.25 mm
0.00 +/- 0.10 mm
Angular Tol. +/- 1°

REMOVE BURRS & SHARP EDGES

MATL: SEE MATRIX

SCALE: NTS

SPEC: SEE MATRIX

FINISH:

DRN: T.LEWIS

3 rd. ANGLE



CHK:

PART No: FC???x1B

APP: *DWB*

LOG No.:

TITLE: STANDARD COLLARS FOR SINGLE BRAIDED UFB/UFC HOSE

DRG. No: D67531