


xxx IF IN DOUBT ASK xxx

JOB No.

ONLY

ISSUED TO PRODUCTION

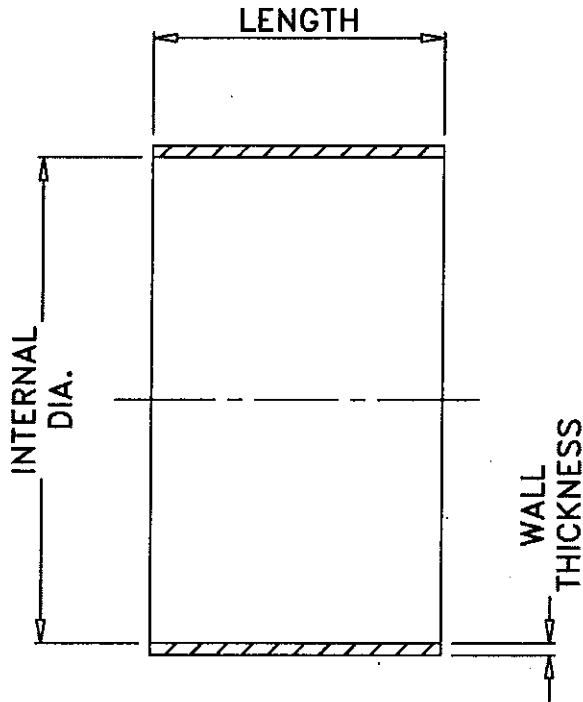

NOMINAL BORE	DN	INTERNAL DIA.	WALL THICKNESS		LENGTH	PART NUMBER		
			(mm)	(SWG)				
1/4"	6	11.73	1.22	18	10	FC006**1X		
5/16"	8	13.74				FC008**1X		
3/8"	10	16.56				FC010**1X		
1/2"	12	20.93			1.63	16	15	FC012**1X
5/8"	15	23.65						FC015**1X
3/4"	20	27.60					20	FC020**1X
1"	25	35.55						25
1 1/4"	32	43.29	1.63	16	40	FC032**1X		
1 1/2"	40	50.15				FC040**1X		
2"	50	64.50				FC050**1X		
2 1/2"	65	78.85				FC065**1X		
3"	80	92.19				FC080**1X		
3 1/2"	90	117.50				FC090**1X		

PART NUMBER COMMON MATERIAL CODES ()**
(OTHER CODES MAY BE USED)
(REFER TO PCM104)

MATERIAL	CODE
ST.STL. 316 S11	AB
ST.STL. 304 S31	AT
BRASS	HB



ISSUE 1
26 October 2006
ISSUE 2
AN 10460
14 May 2008

Tolerances :-
0. +/- 0.50 mm
0.0 +/- 0.25 mm
0.00 +/- 0.10 mm
Angular Tol. +/- 1°

REMOVE BURRS & SHARP EDGES

MATL: SEE MATRIX	SCALE: NTS
SPEC: SEE MATRIX	FINISH:

DRN: T.LEWIS	3 rd. ANGLE	
APP: <i>DLB</i>	PART No: FC???*1X	
DRG. No: D67534	LOG No:	

TITLE: STANDARD COLLARS FOR SINGLE BRAIDED UFA/UFBX HOSE